



## PORCELAIN FLOOR TILE

Elan<sup>®</sup> Tile is the ultimate porcelain tactile indicator chosen by professionals who design and construct the finest commercial, institutional, and public environments. Incorporating the best raw materials in the market, Elan Tile far exceeds the EN 14411 standard, allowing the product to meet the designation of "Porcelain Stoneware" and to be suitable for both interior and exterior applications.

Offering highly durable and versatile tactile walking surface indicators (truncated domes) for warning, and direction indicators for wayfinding, the Elan Tile line of products signals the newest generation of excellence from Surewerx.


### PRODUCT FEATURES

- Certified porcelain stoneware for maximum durability and surface hardness
- Full-body porcelain with high compaction and low absorbency characteristics
- Exceptional resistance to thermal shock and frost
- Not affected by stains, water, or chemicals
- R11 finish meets the most demanding slip-resistance requirements for construction projects in high-traffic areas
- Versatile and easy installation for interior and exterior environments
- 5-year manufacturer's warranty

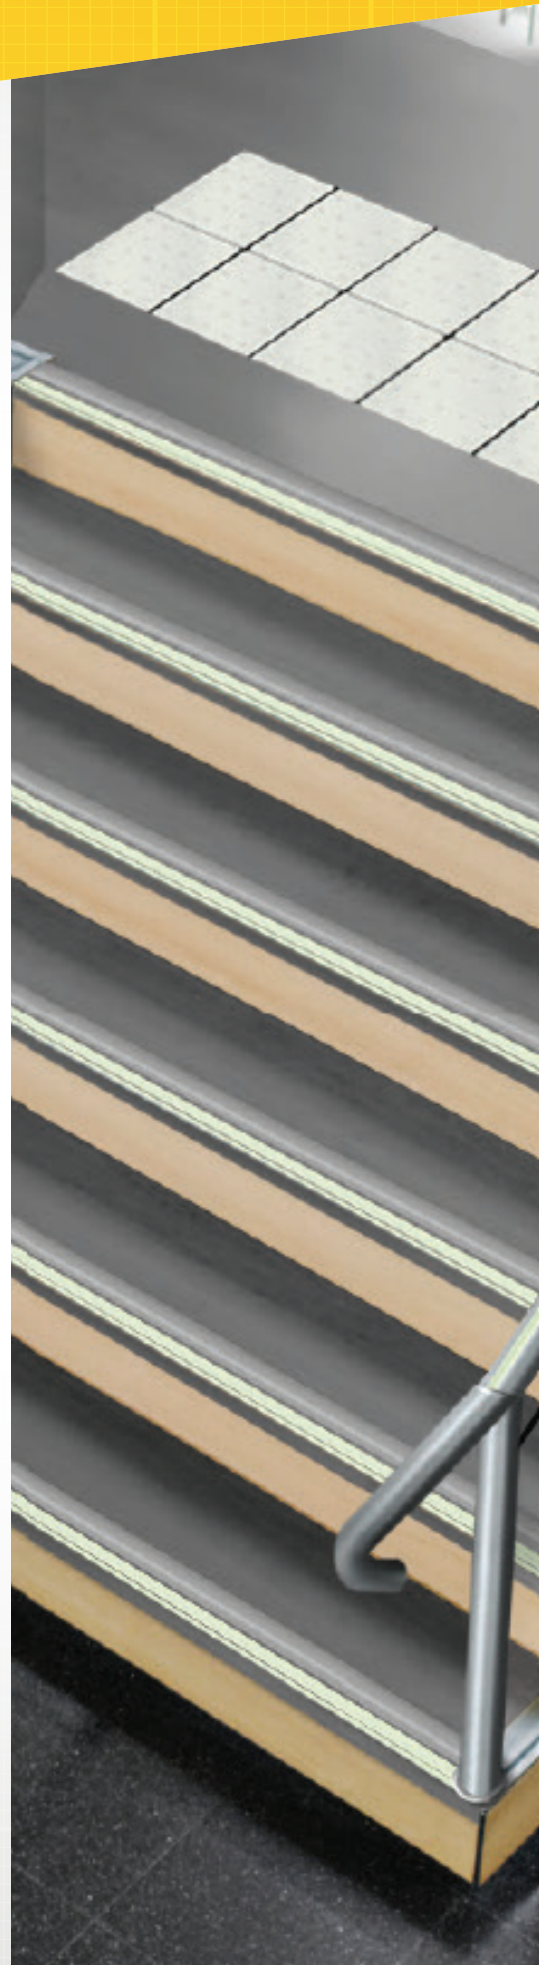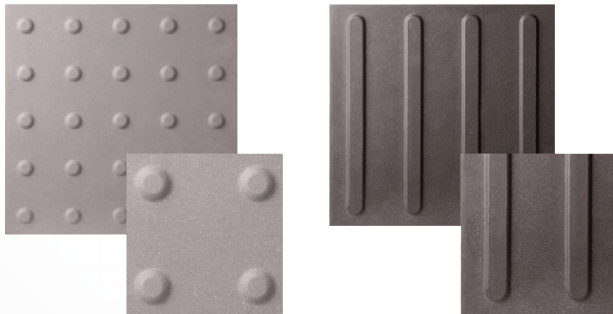




## TACTILE WALKING SURFACE INDICATOR (TWSI) WITH TRUNCATED DOMES

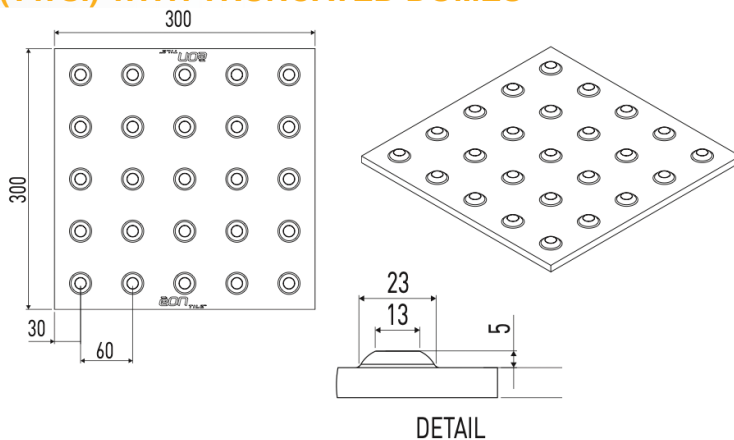

## TACTILE WALKING SURFACE INDICATOR (TWSI) WITH WAYFINDING BARS

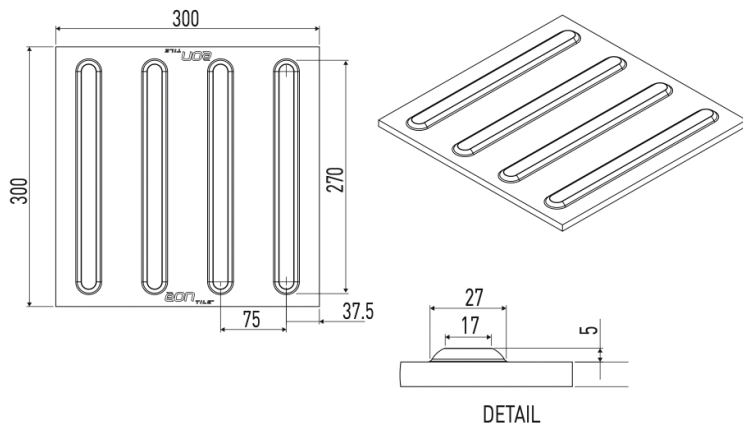

### STANDARD ELAN TILE SIZES

STANDARD SIZE	PRODUCT CODE
12" x 12" (300 x 300 mm)	ELAN-D-1212
12" x 12" (300 x 300 mm)	ELAN-B-1212

### APPLICATIONS

#### Tactile Attention Indicator Truncated Domes

- An unprotected drop-off edge, such as a transit platform where the change in elevation is greater than 250 mm or the slope is steeper than in a ratio of 1:3 (33%).
- The unprotected edges of a reflecting pool.
- An entry into a vehicular route or area where no curbs or other elements separate it from a pedestrian route, such as curb ramps, wheelchair ramps, top of stairs/escalators, and blended transitions.

#### Tactile Direction Indicator Wayfinding Bars

- Located in large open floor areas, such as shopping malls or transportation terminals, to facilitate wayfinding by indicating the primary routes of travel.
- The indicated routes should lead from the entrance to major destinations, such as an information kiosk, registration desk, stairway, elevator, escalators, or store and service doors.


## STANDARD COLOURS



Sand Stone  
Code: ST



Cultured Grey  
Code: CG



Vogue Black  
Code: BK

